


G90-10L TYPE 1

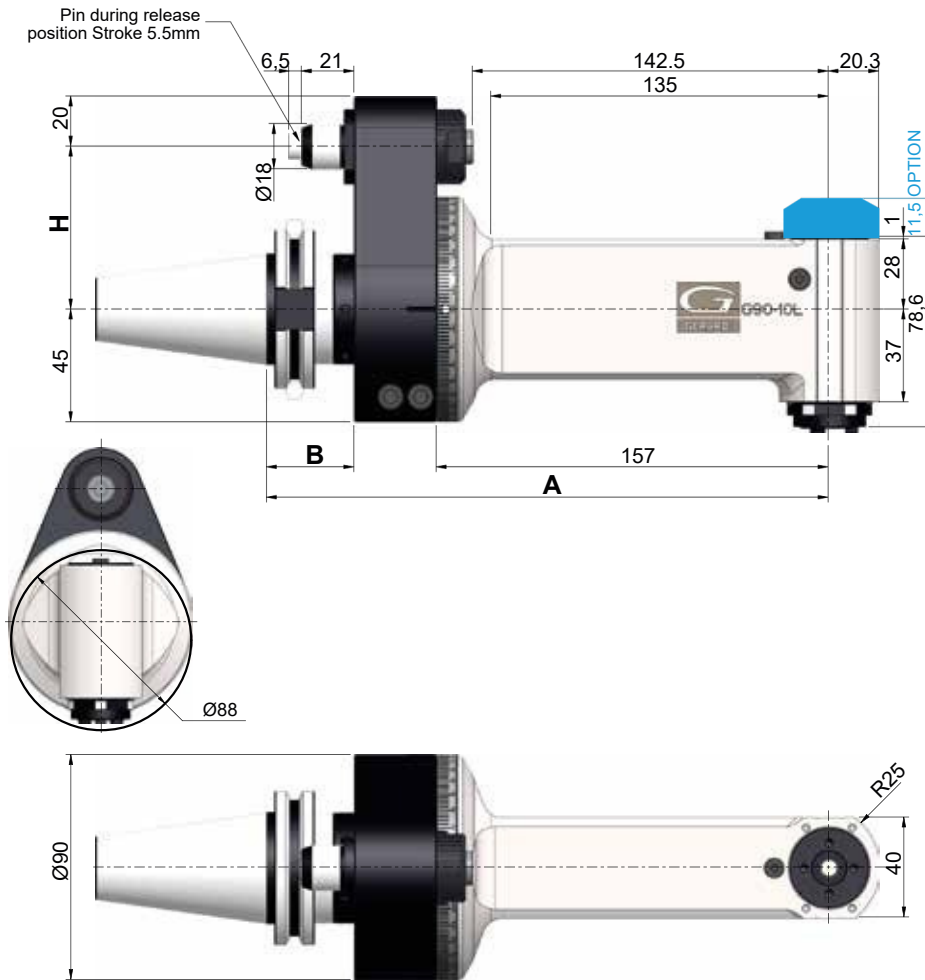

Technical data

	Ratio 1:1		Kg 5,2
	Rpm 10.000		Ø 10
	N 250		M 8
	Nm 10		ER16 Ø1/10

Direction of rotation Opposite to the machine spindle

Coni - Shanks	SK DIN 69871			CAT ANSI B5.50		BT MAS 403			HSK DIN 69893			C. ISO 26623			
Size	30	40	50	40	50	30	40	50	63	80	100	C5	C6	C8	
Dual contact (Optional)															
H	Standard	65 / 80	65 / 80	80	65 / 80	80	65 / 80	65 / 80	80	65 / 80	65 / 80	80	65 / 80	65 / 80	80
	Optional 110														
A		225	225	225	225	225	225	231	232	232	235	228	228	230	
B		35	35	35	35	35	35	41	42	42	45	38	38	40	

PACK WEIGHT:
Bag 8,5Kg



STANDARD EQUIPMENT

Special bag / Stop block / ER nut /
Wrenches / Grease tube / Instruction book

OPTIONS

- COOLANT** - Pin through Max 10bar - 6000Rpm - **Dry running YES**
- COOLANT** - Through shank Max 40bar - 6000Rpm - **Dry running NO**
- OUTPUT** -Shellmill holder Ø16

OUTPUT - ER20

- DOUBLE OUTPUT**- ER16 - ER 11M
- OUTPUT** -Weldon Max Ø12